

# **PEDESTRIAN GATE**







# **CANTILEVER GATE SYSTEMS**

Australian Security Fencing is proud to be serving industry since 1988. For over thirty five years the company has been manufacturing Cantilever Gates for commercial and industrial use, setting the pace with innovative design and proven product excellence.

Australian Security Fencing manufactures a comprehensive range of Cantilever Gates for all commercial and industrial applications including;

- Factories
- Warehouses
- Distribution Centres
- Carpark Entrances

- · Loading Docks
- Sporting Complexes
- · Local and State Government Projects
- · Schools and other Education facilities

We use computer aided design programs extensively in our research and development process seeking to improve the strength and efficiency in our product offering.

We make to measure to ensure correct fit and that installation on site is completed quickly and efficiently.

Don't hesitate to contact Australian Security Fencing to discuss your specific application requirements.

## **SPECIFICATIONS**

## **SUB FRAME**

Gate structure is manufactured from pre-galvanised steel SHS/RHS sections.

Material thickness is dependent on the opening width and the security requirements of the project.

## SIZE

The maximum gate size is 1,200mm wide in single leaf, 2,400mm in Double Gate arrangements.

Height of gate to suit fence line: standard heights 1,800mm – 2,400mm, higher if required.

## **GATE INFILL**

Infill typically Securemax 358 welded mesh.

# CLEAR OPENING - 1009 BETWEEN POSTS 1140 POST CENTERS - 1240 ATTACK SIDE ATTACK SIDE ORVFFIN 8500 SHORT BARB PLATLOOP TIGERTAYE GATE POST FRAME SHS 1004 FALLY WELDED GATE FRAME SHS 5043 AGATE FRAME SHS 5044 AGATE FRAME SHS 5044 AGATE FRAME SHS 5044 AGATE FRA


### **FINISH OPTIONS**

- · Hot Dip Galvanised (standard).
- Dulux Duralloy or Interpon D1000 powdercoat finishes are suitable.
- · Electro-static twin coat wet sprayed paint.

## **SPECIAL NOTES**

- The power supply required for the motor is either:
  - Single phase hard wired (10 amp), located within one metre of the motor.
  - Low voltage 24v wired supply, within one metre of the motor.
  - 24v High efficiency solar power.
- · Work by others:
  - Power supply provision if required.
  - Structurally adequate footings / mounting points to support the gate.

Product warranty - 12 months.

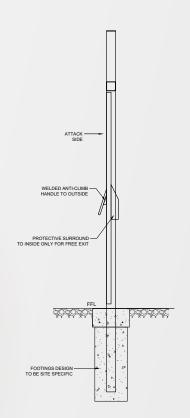





Phone: 1800 666 927 (Australia Wide) | Website: www.asf4u.com.au

## **New South Wales**

138 Fairey Road, South Windsor NSW 2756

nswsales@asf4u.com.au

## Victoria

8 Bessemer Road, Bayswater VIC 3153

vicsales@asf4u.com.au

ABN 39 003 934 094. © Australian Security Fencing Pty Ltd.